

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
10 March 2005 (10.03.2005)


PCT

(10) International Publication Number  
**WO 2005/021412 A1**

- (51) International Patent Classification<sup>7</sup>: **B65H 18/02**  
75/10
- (74) Agent: **FORSSÉN & SALOMAA OY**; Eerikinkatu 2,  
FIN-00100 Helsinki (FI).
- (21) International Application Number:  
PCT/FI2004/000495
- (81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,  
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,  
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,  
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,  
ZW.
- (22) International Filing Date: 24 August 2004 (24.08.2004)
- (25) Filing Language: Finnish
- (26) Publication Language: English
- (30) Priority Data:  
20031218 29 August 2003 (29.08.2003) FI
- (81) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,  
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,  
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,
- (71) Applicant (for all designated States except US): **METSØ  
PAPER, INC.** [FI/FI]; Fabianinkatu 9 A, FIN-00130  
Helsinki (FI).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **NISKANEN, Heikki**  
[FI/FI]; Satakunnanpolku 37, FIN-04400 Järvenpää (FI).

[Continued on next page]

(54) Title: METHOD FOR WINDING A BOARD, PAPER OR MATERIAL WEB AND A WINDER FOR A PAPER, BOARD  
OR MATERIAL WEB

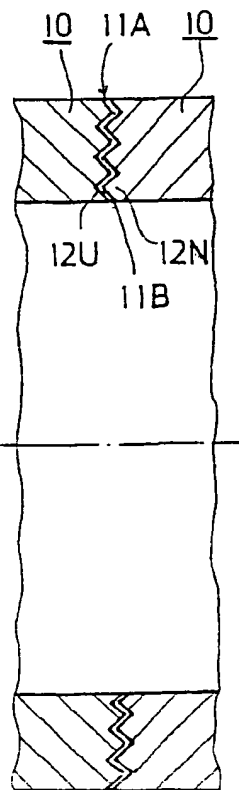

(57) Abstract: The invention relates to a method for winding a paper, board or material web on a winder of the two-drum type. In the method, the winding core (10) ends placed against each other are coupled to be on the same axis of rotation during winding by means of severing cuts (12U, 12N) which are formed in the ends (11A, 11B) of the winding cores (10) and which deviate from a perpendicular cutting line. The invention also relates to a winder for a paper, board or material web for winding the web on a two-drum type winder, which winder winds slit component webs. In the winder, two winding cores (10) placed against each other in an end-to-end relationship have been coupled to each other for the time of winding by means of severing cuts (12U, 12N) which have been made in the ends (11A, 11B) of the winding cores (10) and which deviate from a perpendicular cutting line. The invention also relates to a method for manufacturing a winding core and to a winding core for a winder.

BEST AVAILABLE COPY

WO 2005/021412 A1



SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

— *with international search report*

Method for winding a board, paper or material web  
and a winder for a paper, board or material web

5

The invention relates to a method for winding a paper, board or material web on a winder of the two-drum type according to the preamble of claim 1.

10 The invention also relates to a winder for winding a paper, board or material web on a winder of the two-drum type according to the preamble of claim 4.

Further, the invention relates to a method for manufacturing a winding core for a winder according to the preamble of claim 7.

15 The invention also relates to a winding core for a winder according to the preamble of claim 12.

20 In the prior art, slitter-winders are known in which winding takes place on winding drums after the slitting of a paper, board or material (e.g. plastic, aluminium, etc.) web. In winders of the two-drum type, slit component webs are wound around a winding core, e.g. a roll core, on support of two drums or one drum and a set of drums or two sets of drums. In the following description and claims, for the sake of simplicity, the term winding drum is used when referring to a carrier drum/a set of carrier drums in a winder of the two-drum type, i.e.  
25 including the meanings of both a winding drum and a set of winding drums. In addition, in the following description the term roll core is also partly used in the general sense 'winding core', i.e. by the term roll core is meant a winding core that is made of paper, board, glass fibre, metal, plastic, or the like.

30 In two-drum winders, in which narrower component webs slit with slitter blades from a web unwound from a machine reel are wound into customer rolls, the rolls

are usually placed side by side on two winding drums. Because of variations in the cross-direction profiles, for example, thickness, moisture, roughness or friction, of the web to be wound, adjacent rolls are not always formed with precisely equally large diameters, in spite of the fact that precisely equally long component webs are wound into them. Owing to the different diameters of the rolls, the winding cores placed in the roll centres are displaced with the progress of winding in relation to one another so that their centres of rotation are separated and, at the same time, variations also occur in the angular speeds of the rolls. Because of this detrimental phenomenon there occurs vibration in two-drum winding, with the result that it is necessary to limit speed, i.e. to be content with a lower winding speed, which reduces the capacity of the machine and is, thus, uneconomical.

The problem described above has occurred as long as winders of the two-drum type have been constructed without a shaft, i.e. inside roll cores there is no shaft that couples them together. The seriousness of the problem has, however, varied in the course of the years, because the profile of the web produced on the paper machine has improved and a limited running speed has been accepted on the slitter-winder. In recent years, the diameters of the customer rolls produced have started becoming ever larger and, at the same time, the machine widths and the winding speeds have also increased, for which reason the problem of vibration has been noticed again: even a small variation of profile in the direction of width of the web is cumulated especially during winding of thin paper grades so that faults in the shape of the rolls which arise from the web profile cause a significant vibration problem.

In the winding process, a number of different phenomena are effective which attempt to shift the web rolls that are being formed in their axial direction:

- deflection of winding cylinders, i.e. winding drums,

- faults in the shape of the rolls arising from uneven profile of the web, and
- also the core chucks, which support the winding cores of the outermost web rolls, subject the row of rolls to axial forces when they keep the row of rolls in the desired position.

One problem in winding is also that the length of the winding cores, for example, roll cores, changes during winding because the compression pressure caused by the winding of the web onto the roll core causes widening of the wound web and elongation of roll cores.

The core chucks alone can also produce a compression force acting on the whole row of winding cores if the winding cores are excessively long: the total length of the winding cores is greater than the regulated distance between the core chucks.

When a paper or board web is wound around a roll core, in two-drum or carrier belt slitting the rolls and the roll cores are in a row and they are kept in place in the axial direction by means of core chucks. If there are cross direction thickness variations in the web, the rolls will have different diameters and, consequently, the roll cores are no longer on the same axis of rotation. This readily leads to the bouncing of rolls and the running speed must be lowered. In some places the situation has been helped by disposing sleeves between the roll cores to couple the roll cores together for the time of winding. However, the use of them causes additional work and makes the separation of the rolls more difficult after the winding.

One problem is that if the circumference of a roll changing in a winder is round in its outer surface but the roll core is not located at the centre line, this makes converting more difficult in which the roll is again supported at the centre, because in such a case the roll starts to bounce. This also causes problems in that in converting, for example, in printing houses where roll change is accomplished

as a flying splice change, the alignment of the web is generally monitored based on the edge and if the roll has not been formed properly in respect of the centre, there will be a displacement of the web at the splice in connection with splicing.

5 In the course of the years, the rolls have become larger in size, diameter has increased and width has grown and, along with it, it has been necessary to make the roll cores still harder. Since during tight winding the roll cores nevertheless elongate, this elongation cumulates in the edge rolls and against the core chucks. To prevent the increase of the axial force of the roll chucks, the core chucks have  
10 been provided with flexibility but it increases the dishing of the edge rolls. Roll dishing occurs when a contracted web under tension is wound. The tension changes into a compression stress inside the roll, with the result that the web tends to become wider. This causes that the rolls push one another and the widening cumulates from the middle towards the edges.

15 The problems described above are most difficult when winding a web that has high compressibility and a high friction coefficient. Such web grades include, for example, DIP newsprint which is recycled fibre based newsprint, and sack paper. The degree of seriousness of the problem is affected, among other things, by  
20 where the recycled paper is derived from, what kind of deinking method has been used in its cleaning and what properties the recycled paper has.

With respect to the prior art, reference may be made to FI patent application 20002679, which discloses a method and a device for winding a paper or board  
25 web and proposes an arrangement for the problems described above and, in particular, for determining the compression pressure and the position of core chucks in the winding process, in which arrangement measuring devices for measuring the position and the force of the chuck as well as machine controls for controlling the core chuck are arranged in connection with the core chuck such  
30 that the position and/or the force of the chucks is in a desired value range, i.e. within desired limits, and no harmful vibration is generated because of axial thrust

forces of detrimental magnitude between the winding cores. It is stated that in this method according to the invention it is novel and inventive that in the method the winding cores are placed in a desired position and subjected to a desired compression force by means of the core chucks, the length of the row of the winding cores is determined and the compression force of at least one core chuck is regulated during winding when the length of the row of the winding cores changes to keep the compression force and/or the length of the winding core row within desired limits.

10 With respect to the prior art, reference may also be made to FI patent No. 103103, which discloses a method in winding, wherein a number of separate rolls are formed around separate winding cores placed one after the other while supported by support members, in an attempt to solve the problems described above, in particular in connection with different vibration problems. It is stated that a new  
15 idea in this method is that, in order to reduce the friction coefficient of the winding cores, before, or at the same time as, the winding cores are placed in the winding position, the ends of the winding cores are treated with an agent that reduces the friction coefficient, or a piece of a material that has a low friction coefficient is placed at the ends of the winding cores, and/or the axial thrust force  
20 between the winding cores is lowered by passing a pressurized medium through the core chucks and allowing it to discharge from between the winding cores.

One object of this invention is to create a novel arrangement that can be made use of with the prior art arrangements described above or as a separate system to  
25 eliminate or at least minimize the problems described above.

With a view to achieving the above-mentioned objects as well as the ones that will come out later, the method for winding a paper, board or material web on a winder of the two-drum type according to the invention is mainly characterized in  
30 that which is stated in the characterizing part of claim 1.

The winder for winding a paper, board or material web on a winder of the two-drum type according to the invention is in turn mainly characterized in that which is stated in the characterizing part of claim 4.

- 5 The method for manufacturing a winding core for a winder according to the invention is mainly characterized in that which is stated in the characterizing part of claim 7.

- 10 The winding core for a winder according to the invention is in turn mainly characterized in that which is stated in the characterizing part of claim 12.

- 15 In accordance with the invention, at least one severing cut that deviates from a perpendicular cutting line is made in the ends of winding cores to be placed in end-to-end relationship or in the ends of pieces attached to the ends of a winding core, and a mating cut for the severing cut is made in the end of a winding core, for example, a roll core which is in end-to-end relationship with it.

- 20 The severing cut that deviates from a perpendicular cutting line in accordance with the invention is made either directly in the core material in the end of the winding core, i.e. the roll core, or in a separate piece attached to the end of the roll core. This severing cut can be made, for example, in connection with the sawing of the roll core by turning on a lathe, milling/cutting, grinding, heating, pressing or swaging.

- 25 In accordance with the invention, a severing cut deviating from a perpendicular cutting line is formed in the ends of the winding core, or the roll core, i.e. grooves which are so placed that the ends of the roll cores to be placed in end-to-end relationship have a male and a female grooving against each other, that is, a cut that deviates from a perpendicular cutting line and a cut of its desired mating shape. In the roll cores placed against one another in the winding process, there is  
30 a male grooving at the end of one roll core and a female grooving at the end of the



other roll core. When the core chucks are locked and winding is started, the roll cores are coupled to one another, whereby the roll cores remain on the same axis of rotation during winding, which means that no stepped diameter differences between the rolls can arise. Hence, the rolls also do not start to bounce. From the foregoing it also follows that between the rolls no stepped diameter differences can arise that limit the running speed.

In accordance with the invention, at least one severing cut that deviates from a perpendicular cutting line is made in the end of the winding core, i.e. the roll core, but there can also be more cuts, that is, grooving is formed of at least one groove or a part of it (a diagonal cut). The depth of the grooving is advantageously 0.5 – 5 mm deep and thus such that it couples the roll cores together but does not prevent the rolls from being separated from one another on the floor after winding. The shape of the severing cut can be a broken line, a wavy line or another appropriate shape, for example, an oblique surface.

In accordance with one advantageous additional feature of the invention, the depth of the severing cuts (male - female) which deviate from a perpendicular cutting line and are placed against each other, is formed such that they do not fully correspond to each other but the grooves of the winding cores, or roll cores, to be placed against each other are not mirror images of each other, but, instead, the grooves of one side are unequal in depth. By this means, axial play is provided between the roll cores. When the roll cores elongate during winding, this elongation disappears in the ends of the roll core because of this allowance for longitudinal yielding without it being cumulated in the edge rolls. Thus, roll dishing and the axial force of the chuck are reduced. This also provides the advantage that when the roll becomes wider during winding the sides of the roll are able to lean against one another, which leads to a more stable winding process and neater roll sides at high running speeds. The allowance for longitudinal yielding, i.e. the longitudinal yield limit in mating cuts of different depths, can be, for example, 0.5 – 2 mm.

The invention is suitable for use in connection with all different roll core sizes and for all wound webs. It is particularly advantageous when winding a material that has high compressibility and a high friction coefficient, for example, DIP  
5 newsprint and sack paper.

In the following, the invention will be described in greater detail with reference to the figures in the appended drawing, but the invention is by no means meant to be narrowly limited to the details of the figures.

10

Figures 1A – 1D show four different alternatives for severing cut shapes of a roll core end.

15

Figure 2 shows further different additional alternatives.

In the following figures, the parts corresponding to one another have been designated by the same reference numerals. As shown in the figures, a cut 12U that deviates from a perpendicular cutting line has been made in one end 11A of a winding core, or a roll core 10, which cut 12U is placed against an end 11B of a  
20 roll core 10, as a mating cut 12N, situated against it in end-to-end relationship, thereby forming, in a way, a male grooving 12U and a female grooving 12N, which couple the ends 11A, 11B of the roll cores 10 to each other such that their centre lines of rotation remain on the same line during the time of winding.

25 In the exemplifying embodiment shown in Fig. 1A, the severing cuts 12U, 12N which deviate from perpendicular have been made as a broken line in which the male and female groovings 12U, 12N conform directly to each other, thus coupling together the ends 11A, 11B of the roll cores 10 placed against each other.

30

Fig. 1B shows an arrangement in which the severing cut shape 12N of the end 11A of one roll core 10 has been made deeper than the severing cut shape 12U of the end 11B of the other roll core 10, which end 11B is placed against the first-mentioned end 11A, i.e. the female grooving 12N has been made deeper than the male grooving 12U, thereby providing allowance for longitudinal yielding in accordance with an advantageous embodiment, which allowance makes it possible to compensate for the elongation of the roll cores 10 that occurs during winding.

Figs. 1C and 1D show an arrangement in which the severing cuts 12U, 12N in accordance with the invention have been formed into groovings 12U, 12N such that the main direction of the grooving 12U in the end of at least one roll core 10 is oblique towards the centre line of the roll core 10, thereby providing more distance for yielding, i.e. when the roll cores 10 elongate during winding.

The example A of Fig. 2 shows an embodiment in which the severing cuts 12U, 12N used form a serrated grooving.

The example B of Fig. 2 comprises a serrated grooving 12U, 12N with finer teeth as compared with the example A.

The example C of Fig. 2 shows an embodiment which uses a curve-shaped severing cut as the severing cut shapes 12U, 12N.

The example D of Fig. 2 shows one advantageous exemplifying embodiment in which the groovings 12U, 12N have been accomplished by means of two grooves and two tongues, longitudinal adjustment being accomplished by means of a greater groove depth of one grooving 12N.

The example E of Fig. 2 shows an embodiment in which the coupling of roll cores 10 to each other is accomplished by means of oblique severing cuts 12U, 12N.

The example F of Fig. 2 has been accomplished by means of one groove-and-tongue broken-line-shaped severing cuts 12U, 12N.

5 The example G of Fig. 2 shows an embodiment in which an oblique severing cut, i.e. an oblique surface 12N, has been combined with one tongue-shaped cut 12U. The examples H and I of Fig. 2 show wavy line types of severing cuts 12U, 12N, which have been accomplished using one groove-and-tongue shape 12N, 12U placed at different locations in the ends of the roll core 10. Of course, the wavy line may also extend over the entire area of the end cut of the roll core.

10

The cutting lines described above and other possible cutting lines in accordance with the different embodiments of the invention, which cutting lines deviate from perpendicular, can be accomplished such that in one end 11A of each roll core 10 there is a cut 12U of the male type and in the other end a cut 12N of the female  
15 type or such that roll cores 10 are used which have male cuts 12U and female cuts 12N, respectively, in both ends and the location of these roll cores 10 in the winder is alternated.

Above, the invention has been described only with reference to some of its  
20 advantageous exemplifying embodiments, but the invention is by no means meant to be narrowly limited to the details of them.

## Claims

1. A method for winding a paper, board or material web on a winder of the two-drum type, in which winding process separate rolls are formed side by side around winding cores (10) placed one after the other while supported by support members, and in which method the winding cores (10) are supported at their ends against one another by means of core chucks arranged in connection with the free ends of the outermost winding cores (10), in which method, the winding core (10) ends placed against each other are coupled to be on the same axis of rotation during winding by means of severing cuts (12U, 12N) which are formed in the ends (11A, 11B) of the winding cores (10) and which deviate from a perpendicular cutting line, **characterized** in that, in the method, allowance for longitudinal yielding between the winding cores (10) placed against one another is adjusted by means of the depth and shaping of the severing cut (12U) and the mating cut (12N) placed against each other in order to provide axial play between the winding cores (10).
2. A method as claimed in claim 1, **characterized** in that the severing cuts (12U, 12N) are made directly in the end (11A, 11B) of the winding core (10) or in a separate piece attached to the end (11A, 11B) of the winding core (10).
3. A method as claimed in claim 1, **characterized** in that the severing cuts (12U, 12N) that deviate from a perpendicular cutting line, i.e. a severing cut and its mating cut, are groovings which are placed such that in the ends (11A, 11B) of the winding cores (10) placed in end-to-end relationship there is a male grooving (12U) and a female grooving (12N) against each other.
4. A winder for a paper, board or material web for winding the web on a two-drum type winder, which winder winds slit component webs out of which separate rolls are formed side by side around winding cores (10) placed one after the other while supported by support members, in which winder a core chuck has been

arranged in connection with the free ends of the outermost winding cores (10) to keep the roll cores placed one after the other in place, in which winder, two winding cores (10) placed against each other in end-to-end relationship have been coupled to each other for the time of winding by means of severing cuts (12U, 12N) which have been made in the ends (11A, 11B) of the winding cores (10) and which deviate from a perpendicular cutting line, **characterized** in that the shape or the cutting depth of the severing cut and the mating cut of the winding cores (10) have been dimensioned such that there remains allowance for longitudinal yielding between the winding core (10) ends (11A, 11B) placed against each other.

5. A winder as claimed in claim 4, **characterized** in that the severing cuts comprise a severing cut (12U) and its mating cut (12N) which have been made either directly in the material of the winding core in the end (11A, 11B) of the winding core (10) or in a separate piece attached to the end (11A, 11B) of the winding core (10).

6. A winder as claimed in claim 4 or 5, **characterized** in that a severing cut (12U) that deviates from a perpendicular cutting line has been shaped in the ends (11A, 11B) of the winding core (10) and a mating cut (12N) has been shaped in the winding core (10) to be placed against it, i.e. groovings which have been placed such that in the ends (11A, 11B) of the winding cores (10) placed in end-to-end relationship there is a male grooving (12U) and a female grooving (12N) against each other.

25

7. A method for manufacturing a winding core for a winder, in which method, at least one severing cut (12U, 12N) which deviates from a perpendicular cutting line is made in the end of the winding core (10) to keep the winding cores on the same axis of rotation in the winder during winding, in which method, at least one severing cut (12U) deviating from a perpendicular cutting line and its mating cut (12N) are made in the winding cores (10) to be placed against one another in the

30

winder, **characterized** in that, in the method, the depth of the severing cuts which deviate from a perpendicular cutting line and which are to be placed against each other is made such that they do not fully correspond to each other but the grooves on one side of the winding cores (10) to be placed against each other are unequal  
5 in depth, thereby providing axial play.

8. A method as claimed in claim 7, **characterized** in that a severing cut deviating from a perpendicular cutting line is made either directly in the end of the winding core (10) or in a separate piece attached to the end of the winding core (10).  
10

9. A method as claimed in claim 7 or 8, **characterized** in that a groove or groovings are shaped in the end of the winding core (10), which groovings are placed such that in the ends of the winding cores (10) to be placed in end-to-end relationship in the winder there are male and female groovings (12U, 12N) against  
15 each other, i.e. a cut deviating from a perpendicular cutting line and a cut of its desired mating shape.

10. A method as claimed in any one of claims 7 to 9, **characterized** in that, in the method, the grooving is formed of at least one groove or its part.  
20

11. A method as claimed in any one of claims 7 to 10, **characterized** in that the severing cut that deviates from a perpendicular cutting line is made by turning on a lathe, milling/cutting, grinding, heating, pressing or swaging.

25 12. A winding core (10) for a winder, in the end of which winding core (10) at least one severing cut deviating from a perpendicular cutting line has been made to keep the winding cores on the same axis of rotation in the winder during winding such that at least one severing cut (12U) deviating from a perpendicular cutting line and its mating cut (12N) have been made in the winding cores (10) to  
30 be placed against each other in the winder, **characterized** in that the shape or the cutting depth of the severing cut and the mating cut of the winding cores (10)

have been dimensioned such that there remains allowance for longitudinal yielding between the winding core (10) ends (11A, 11B) placed against each other.

- 5     13. A winding core (10) as claimed in claim 12, **characterized** in that a severing cut deviating from a perpendicular cutting line is either directly in the end of the winding core (10) or in a separate piece attached to the end of the winding core (10).
- 10    14. A winding core (10) as claimed in claim 12 or 13, **characterized** in that in the end of the winding core (10) there is a groove or groovings, which have been placed such that in the ends of the winding cores (10) to be placed in end-to-end relationship in the winder there is a male and a female grooving (12U, 12N) against each other, i.e. a cut deviating from a perpendicular cutting line and a cut  
15    of its desired mating shape.
15. A winding core (10) as claimed in any one of claims 12 to 14, **characterized** in that the grooving in the end of the winding core (10) has been formed of at least one groove or its part.



1/3

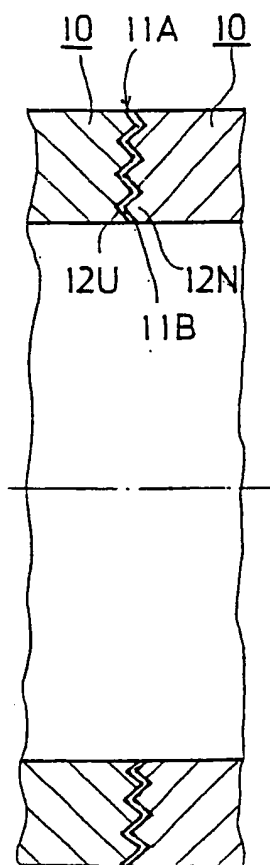


FIG.1A

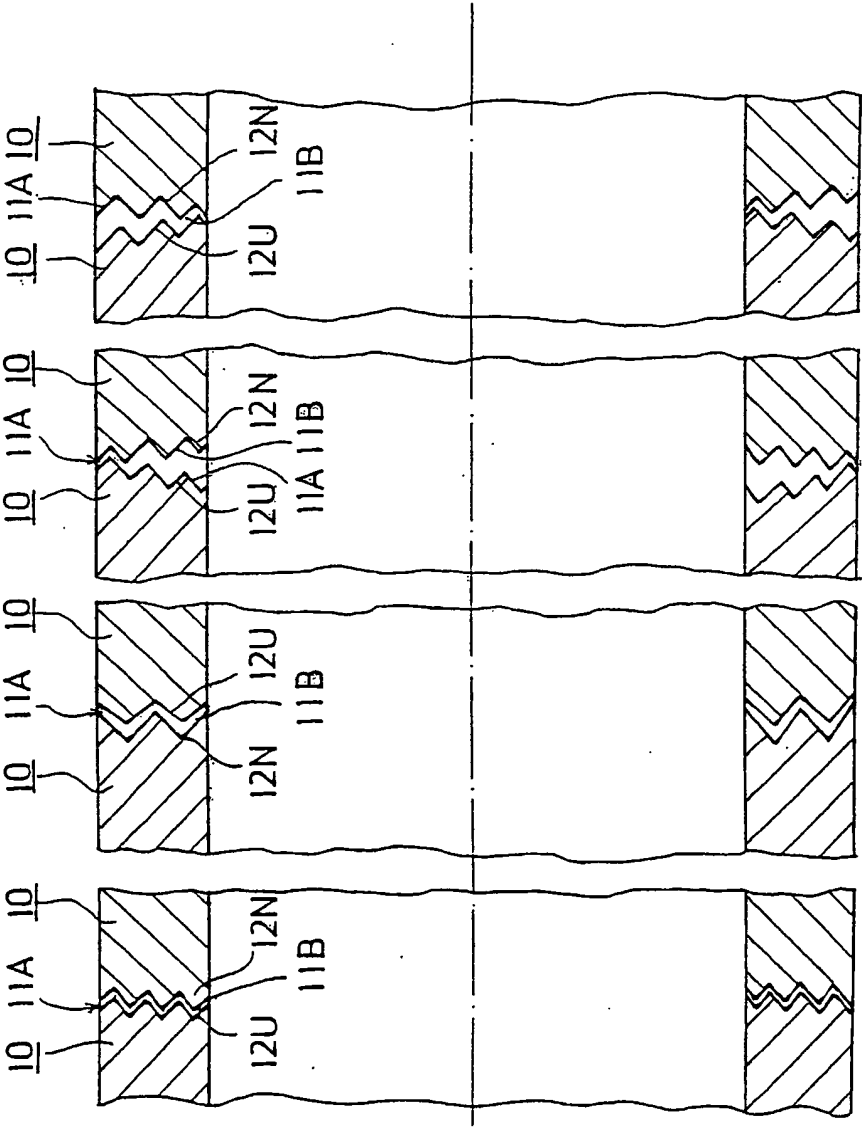


FIG.1A    FIG.1B    FIG.1C    FIG.1D

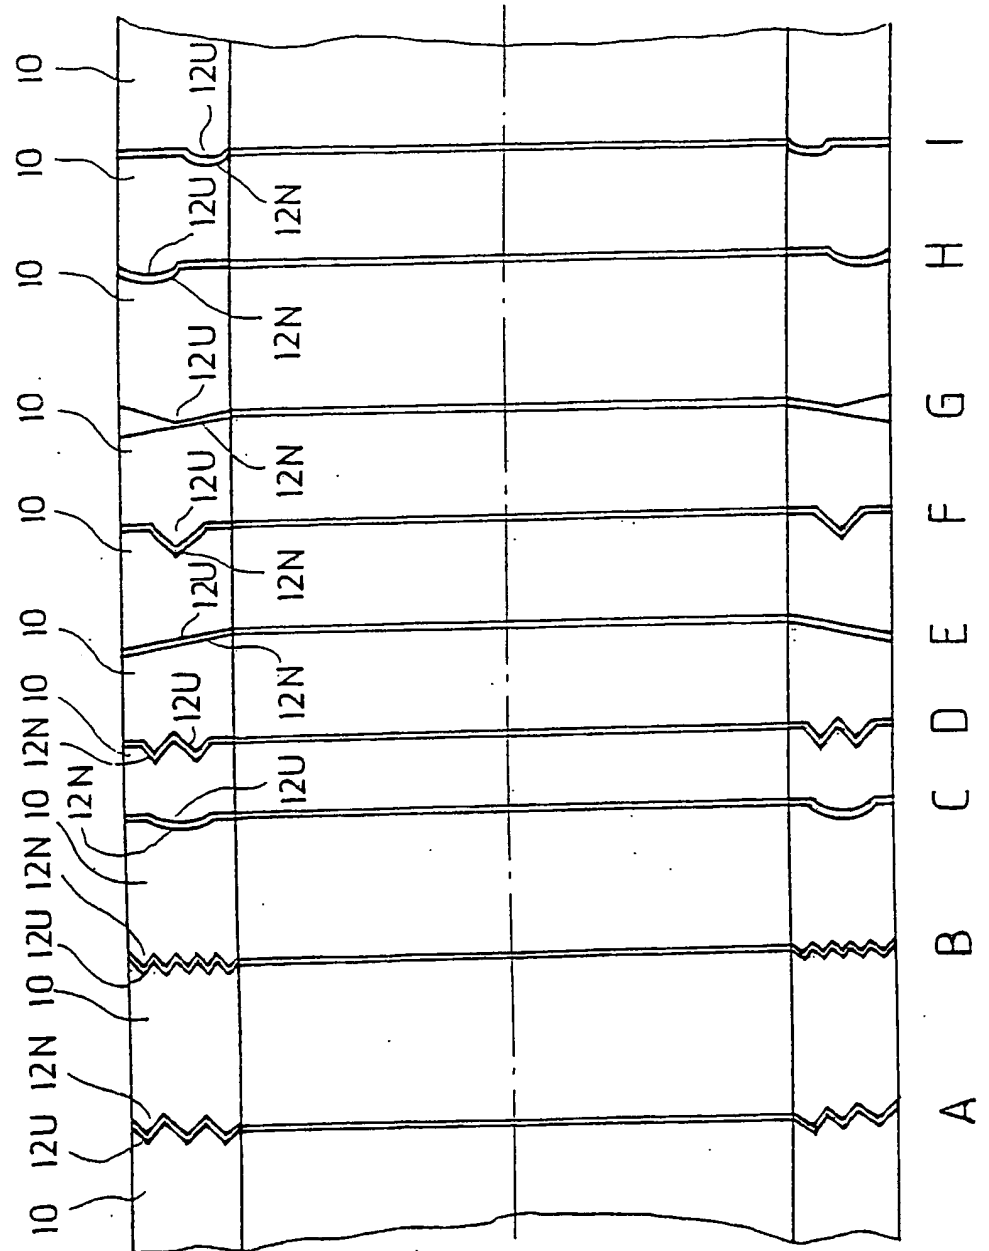


FIG. 2

## INTERNATIONAL SEARCH REPORT

International Application No  
PCT/FI2004/000495A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 B65H18/02 B65H75/10

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 B65H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)  
EPO-Internal, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DE 94 18 081 U (BELOIT TECHNOLOGIES INC) 14 March 1996 (1996-03-14) page 2, line 18 - page 3, line 20; figures -----	1,4
A	US 3 990 648 A (HESS LOYAL H ET AL) 9 November 1976 (1976-11-09) column 3, line 29 - column 4, line 22; figures -----	1,4
A	PATENT ABSTRACTS OF JAPAN vol. 0135, no. 38 (M-900), 30 November 1989 (1989-11-30) & JP 1 220663 A (MEISAN SHOJI KK; others: 01), 4 September 1989 (1989-09-04) abstract; figures 2,3 ----- -/--	1,4

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*Z\* document member of the same patent family

Date of the actual completion of the international search

18 November 2004

Date of mailing of the international search report

25/11/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl.  
Fax: (+31-70) 340-3016

Authorized officer

Haaken, W

## INTERNATIONAL SEARCH REPORT

International Application No  
PCT/FI2004/000495

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 792 245 A (VALMET CORP) 3 September 1997 (1997-09-03) cited in the application the whole document -----	1,4
A	US 5 441 780 A (DISSEN ROBERT ET AL) 15 August 1995 (1995-08-15) the whole document -----	7,12
A	DE 93 20 546 U (BAT CIGARETTENFAB GMBH) 22 September 1994 (1994-09-22) claims; figures -----	7,12
P,A	WO 03/082718 A (METSO PAPER INC ; VUORISTO TOMMI (FI)) 9 October 2003 (2003-10-09) cited in the application -----	

## INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/FI2004/000495

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
DE 9418081	U	14-03-1996	DE 9418081 U1	14-03-1996
US 3990648	A	09-11-1976	BR 7607661 A	27-09-1977
			CA 1053637 A1	01-05-1979
			GB 1565395 A	23-04-1980
			IT 1064382 B	18-02-1985
			JP 1028113 C	25-12-1980
			JP 52063406 A	25-05-1977
			JP 55019862 B	29-05-1980
			MX 144690 A	11-11-1981
JP 1220663	A	04-09-1989	JP 1805727 C	26-11-1993
			JP 5017139 B	08-03-1993
EP 0792245	A	03-09-1997	FI 955216 A	02-05-1997
			CA 2208164 A1	09-05-1997
			DE 69602821 D1	15-07-1999
			DE 69602821 T2	04-11-1999
			EP 0792245 A1	03-09-1997
			JP 10512226 T	24-11-1998
			US 5908171 A	01-06-1999
			AT 181034 T	15-06-1999
			WO 9716367 A1	09-05-1997
US 5441780	A	15-08-1995	NONE	
DE 9320546	U	22-09-1994	DE 4301625 A1	28-07-1994
			DE 9320546 U1	22-09-1994
WO 03082718	A	09-10-2003	FI 20020625 A	03-10-2003
			WO 03082718 A1	09-10-2003

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**